


Product Installation

Suitable place

- Swimsuit Spin Dryer Bamiko is to be used in dry or slightly humid environment.
- The product must be installed at least 2 – 3 meters from a place where water can splash.
- Swimsuit Spin Dryer should not be installed in place where air temperature exceeds 40°C.
- Swimsuit Spin Dryer should not obstruct the free passage and should be placed on a wall that can hold at least 20 kg.
- Power socket should be near the place of installation.
- Drain tray or waste connection should be close to the place of installation. If not available, you can place water tank under the swimsuit spin dryer. **The drain hose needs to have a descending slope at whole length (it should neither be level or ascending, nor bent excessively, in order to provide sufficient water drainage)!**



Product Installation

At installation place, drill 4 dowel holes with diameter of 8 mm and secure the mounting brackets with screws. Make sure that the mounting brackets are placed correctly according to the diagram and level.

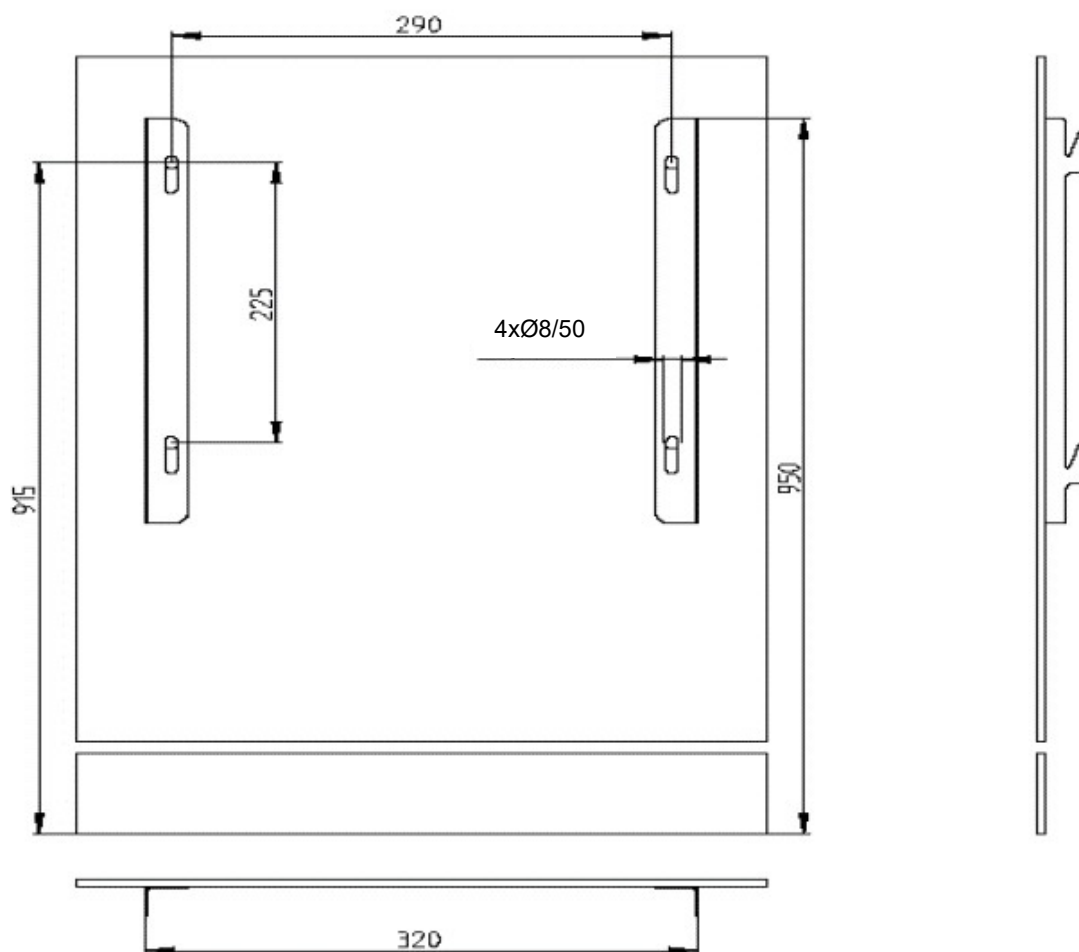

After bracket installation, remove Swimsuit Spin Dryer from a box, take out all transport cushion material and remove the stainless steel plate located at the bottom of the product that prevents engine from moving by unscrewing two screws. Please store all transport material and the stainless steel plate with the screws. Those parts are mandatory in case you need to send the product back for repair to prevent any damage during transport.

Locate four holes on the back side of the product and put the product on the bracket. Gently hit the top of the Swimsuit Spin Dryer to complete the installation. Make sure that the product is securely locked on the bracket.

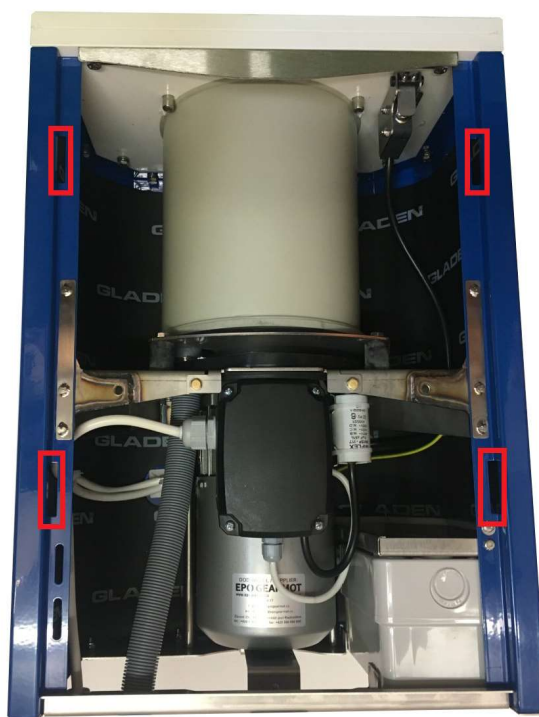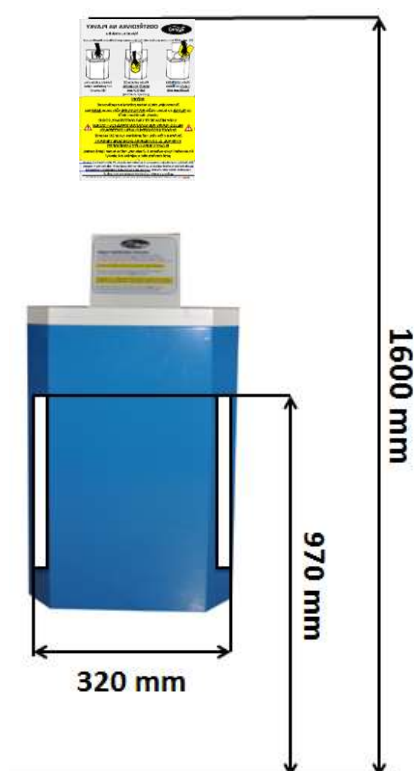

After installation make sure that the product has a safety information label installed on the lid and place safety information panel to a set height (1600 mm from the floor to the top of the panel).

First use of the product

- After installation of the product to the wall, connect the power cable into a socket.
- Make sure that the RCD at the bottom of the device is switched on.
- Before first use make sure, that the inner drum is securely screwed to the engine.
- Make sure that the device was not damaged during installation.
- Use the Swimsuit Spin Dryer according to information stated on safety information panel and label.