

Bamiko - Swimsuit Water Extractor / OD - 100

Dimensions:

- Height: 517 mm
- Width: 365 mm
- Depth: 240 mm

Total Power:

- In use: 0,14 kW
- Idle: 0,003 kW

Weight: 20 kg

Noise Level: < 70dB

Voltage: 1N~230V/50Hz

IP rating: IPX4

Used Materials:

- Top cover: polypropylen (white)
- Body: stainless steel 1.4571
- Inner drum: passivated stainless steel 1.4571
- Outer drum: polypropylen (grey)



Safety


- In accordance with government regulations 176/2008 Sb., 117/2016 Sb. a 481/2012 Sb.
- In accordance with directive of European Parliament's Directive 2006/42/EU, 2014/30/EU a 2011/65/EU
- In accordance with the standard EN 50569 and related standards.
- Safety electromagnetic brake.
- RCD with built-in circuit breaker.
- Rubber ring on the inner drum to protect the swimsuit.

Suitable place for installation

- **Close to the power socket** – lenght of the power cord 2,5m, optionally 4,5m.
- **Close to the drain (lenght of drain hose 0,8m) or waste connection.**
- Dry or slightly humid environment with temperature less than 40°C.
- At least 2 to 3 meters from a place where water can splash.
- The product cannot block safe passage and should be installed on a wall that can hold 20 kg.

Installation

- The product is hanged on two stainless steel holders that are fixed to the wall by fasteners and screws, see the picture bellow.
- Following the installation instructions, the product should be in the following heights:
 - Top of the product 1025 mm from ground
 - Bottom of the product 509 mm from ground

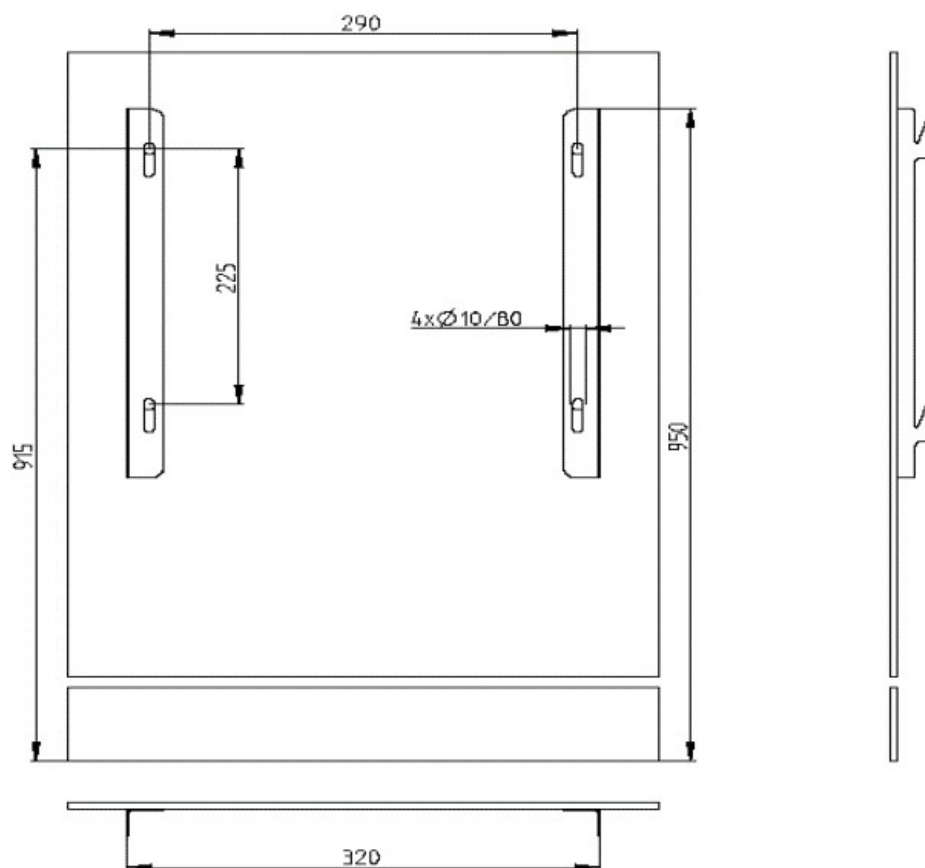

- 1 – Main body
- 2 – Closing cover
- 3 – Inner drum



- 1 – RCD circuit breaker
- 2 – Engine ventilation
- 3 – Drain hose
- 4 – Power cord