

RECOMMENDED WASTEWATER DISPOSAL - OD 100, B 250-1 built-in


R10

BAMIKO


!WARNING Installation must be done in accordance with all applicable local plumbing codes and regulations if you are in doubt consult the connection with a local plumber.

!WARNING Check regularly that the drain hose is free of obstacles and that the wastewater flows freely. In case of insufficient flow, clean or replace the drain hose!

!WARNING The drain hose must slope down at its whole length. It must not be bent or twisted!

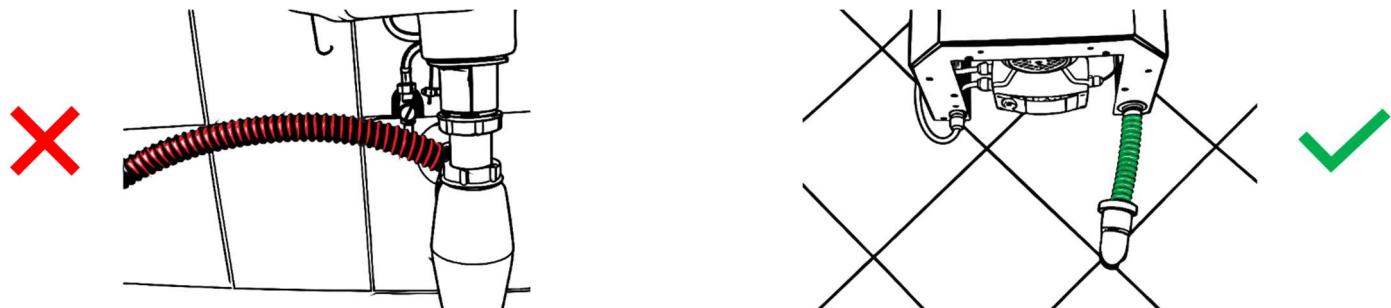

Connection to a waste line

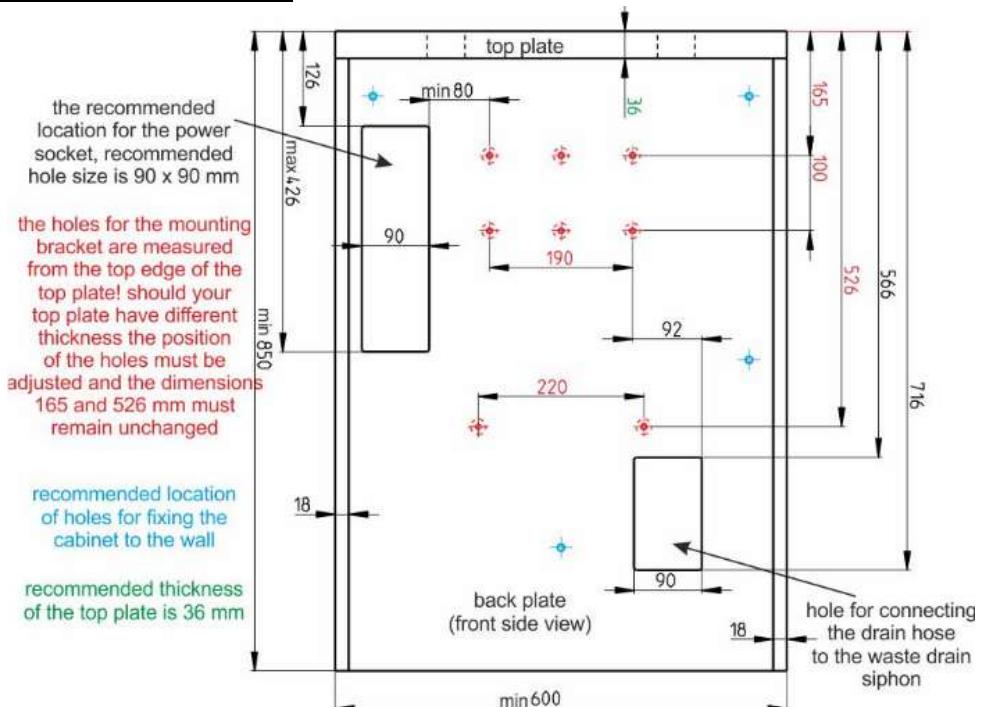

front side view

A - Power cord - length 2.5 m

B - Drain hose - length 0.7 m

- Inner diameter 25 mm
- Outer diameter 31 mm


Shorten the drain hose according to your needs. The drain hose must not be bent or twisted and it must always slope down to provide adequate water disposal. Not following this instruction, could leave to insufficient flow of water which could cause unpleasant smell and damage to the product.

RECOMMENDED WASTEWATER DISPOSAL - OD 100, B 250-1 built-in

R10

BAMIKO

Connection to a water container

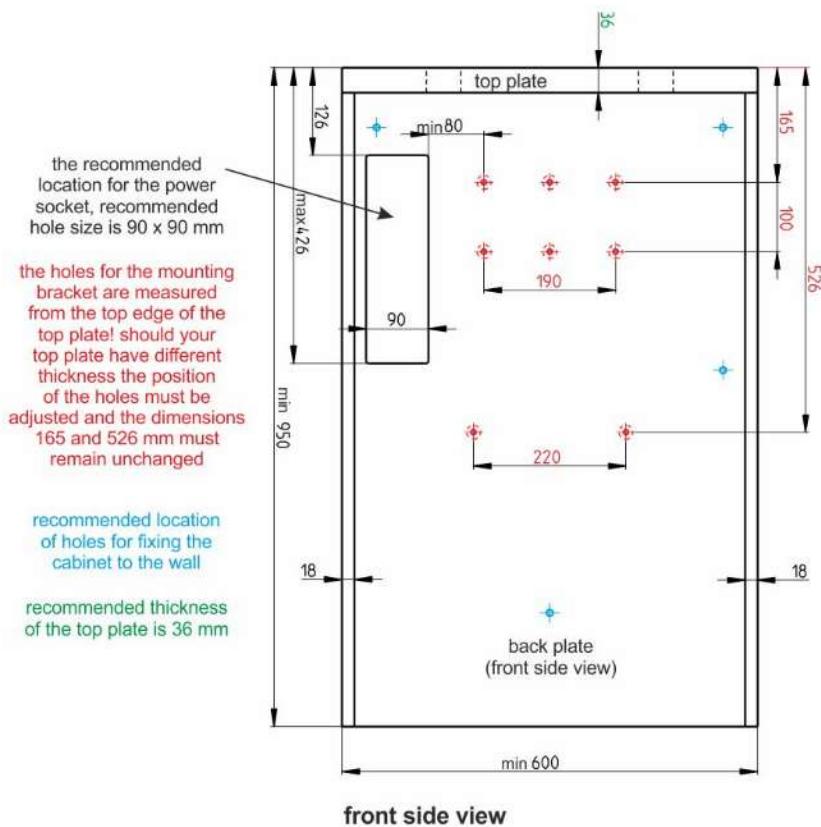

You can connect the drain hose to a water container that is placed underneath the dryer. The capacity of the water container is 18 liters of water and it needs to be emptied manually.

After installation of the dryer and the water container shorten the drain hose so that it extends 5 - 10 cm below the top of the water container. Pull the drain hose through the hole in the water container, this way the drain hose will stay in place.

This installation is ONLY possible on walls that can hold at least 50 kg of weight.

⚠WARNING After installation of the dryer and the water container shorten the drain hose so that it extends 5 - 10 cm below the top of the water container.

